
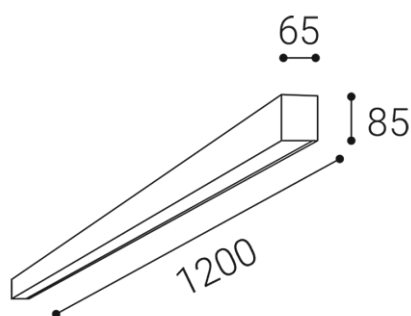


LINO 120, B

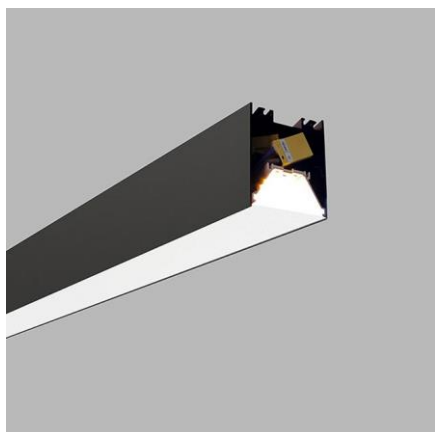


Name	
Code	
Color	
Power	
Lumen output	
Color temperature	
Efficacy	
Driver	
Electrical insulation class	
Voltage / Frequency	
Color Rendering Index	
SDCM	
Light beam angle	
Unified Glare Rating	
Light source	
Dimmable	
LED Lifetime	
Warranty	
Ingress Protection	
Material	

Product

LINO 120, B
6312153D
BLACK / RAL 9005

Power

32W ± 10 %
3680lm ± 10 %
3000K/3500K/4000K
115lm/W
800mA

220-240V/50-60Hz

Information

80+
< 3
160°
PRISMA DIFFUSER <19
LED
DALI
L90B10 50.000h 25°C
5 YEAR

Other data

IP 20
ALUMINIUM/PMMA

EN

Connectable Linear luminaire system. Connectors, suspension, power supply and other components are available. Made of aluminum.
Available in white and black.
Application:
stores, showrooms, business premises, residences

CZ

Systém lineárních svítidel. K dispozici jsou spojky, závěsy, napájení a další komponenty. Vyrobeno z hliníku.
K dispozici v bílé a černé barvě.
Použití:
prodejny, showroomy, obchodní prostory, rezidence

DE

Lineares Beleuchtungssystem. Aufhang, Konnektoren, Einspeisung und andere Komponenten sind erhältlich. Aus Aluminium gefertigt.
Erhältlich in weiß und schwarz.
Anwendung:
Geschäfte, Ausstellungsräume, Geschäftsräume, Residenzen

SK

Systém lineárnych svietidiel, spájateľný do zostáv. K dispozícii sú spojky, závesy, napájanie a ďalšie komponenty. Vyrobené z hliníka.
K dispozícii v bielej a čiernej farbe.
Použitie:
predajne, showroomy, obchodné priestory, rezidence

