




**DUSTER III**

SURFACE OR SUSPENDED  
DUSTPROOF LUMINAIRES

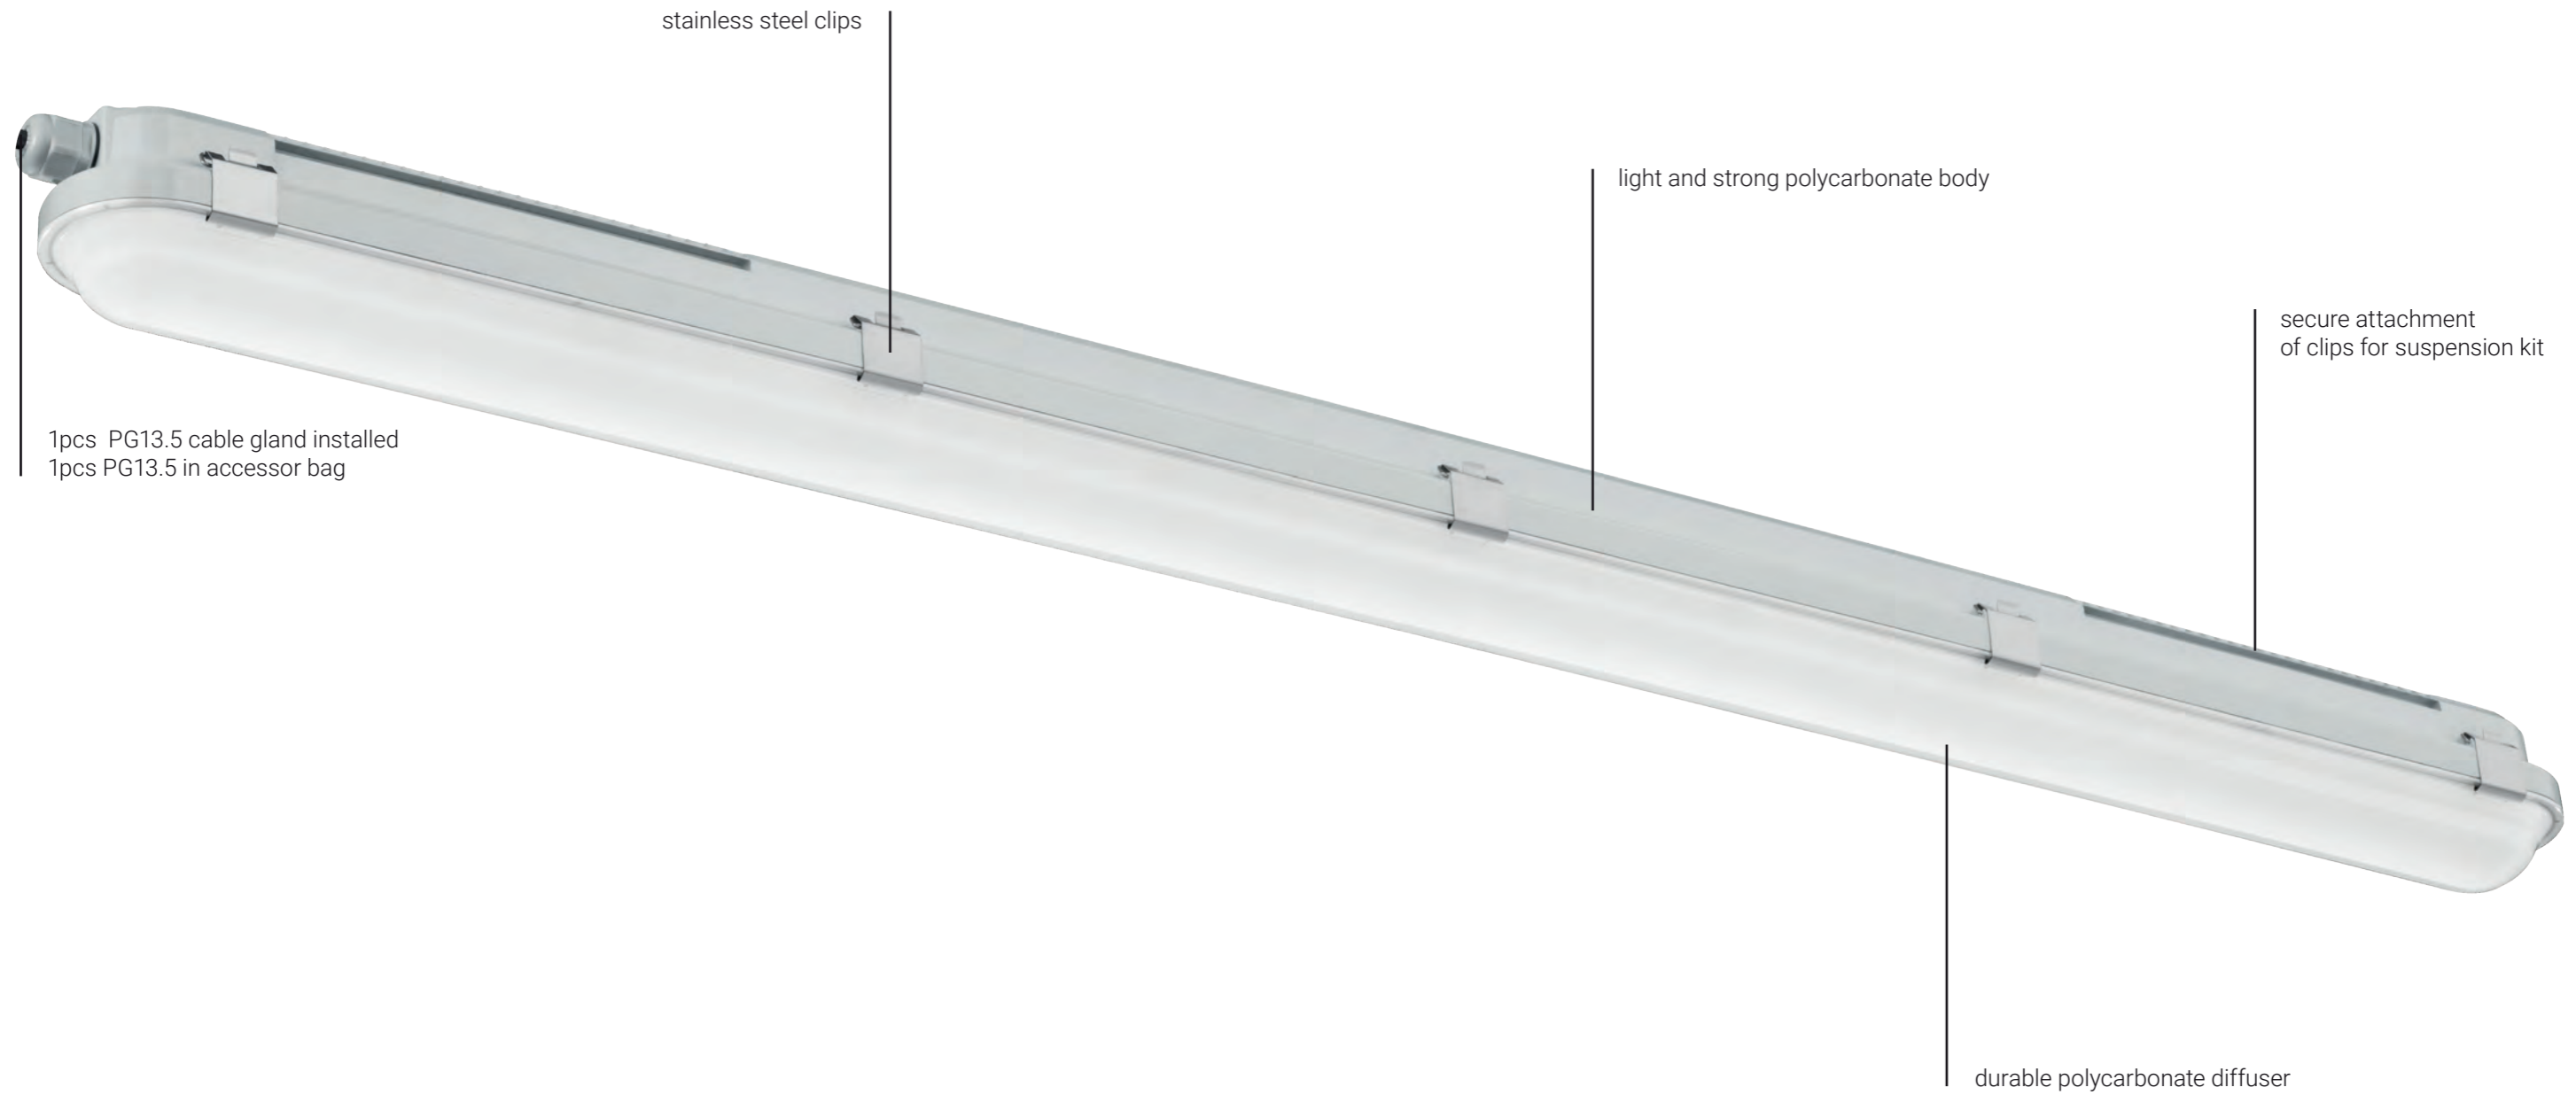


A series of professional dustproof lamps with IP66 protection.  
Light source - SMD LED. The lamp and diffuser are made of polycarbonate,  
stainless steel clips. Very high efficiency - 150 lm/W.

Available in 2 sizes. Adjustable power. IK10 resistance.

Use: general lighting in public and commercial spaces, including dusty and damp  
spaces (garages, parking lots, warehouses, industrial spaces)






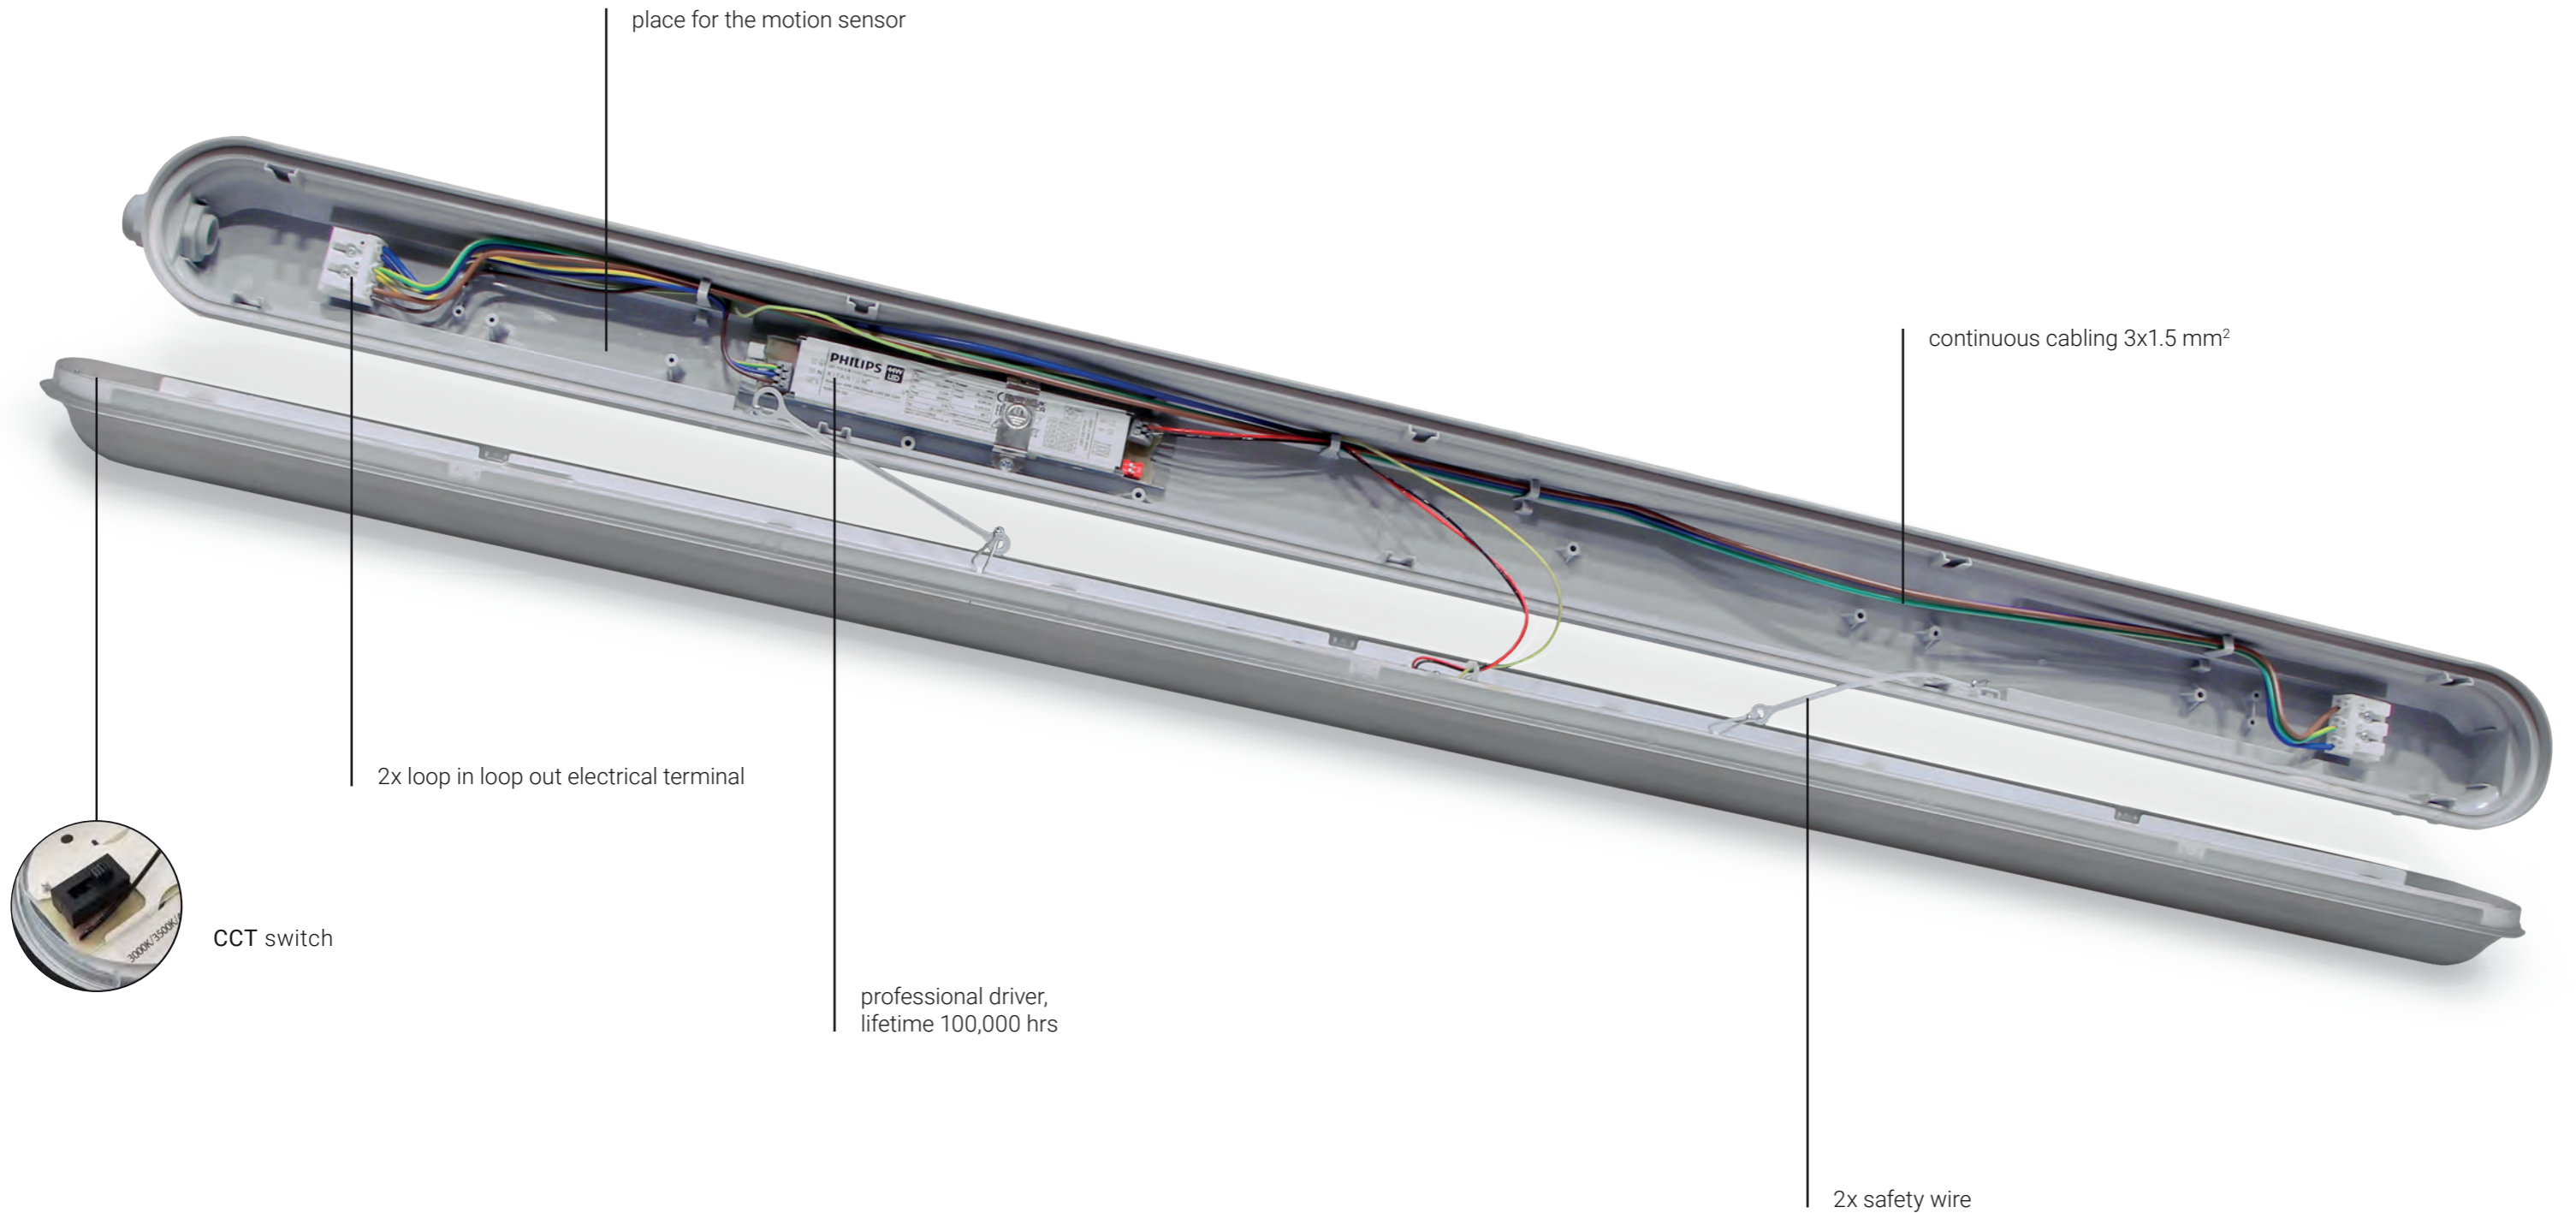


A series of professional dustproof lamps with IP66 protection. Light source - SMD LED. The lamp and diffuser are made of polycarbonate, stainless steel clips. Very high efficiency - 150 lm/W.

Available in 2 sizes. Adjustable power. IK10 resistance.

Use: general lighting in public and commercial spaces, including dusty and damp spaces (garages, parking lots, warehouses, industrial spaces)



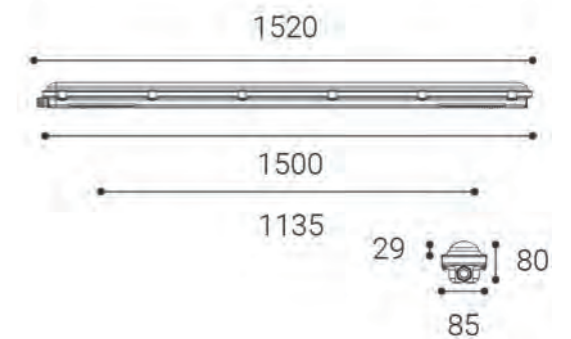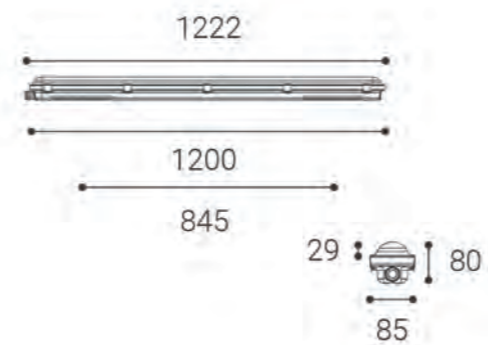

## DUSTER III 120

Luminous intensity distribution diagram

Light source: **20-35W**  
Color temperature: **3CCT 3000/3500/4000 K**  
Lumens output: **3150-5150 lm**


CRI: **> 80**  
Optics: **160°**  
IP Rating: **66**

Color: **Grey / Frosted**

Emergency:  
**YES** 1221851EM

Streamer self-test 2W 3hours EM kit(Lion-battery)

Control:  
**ON/OFF** 1221851  
**DALI/PUSH** 1221851D

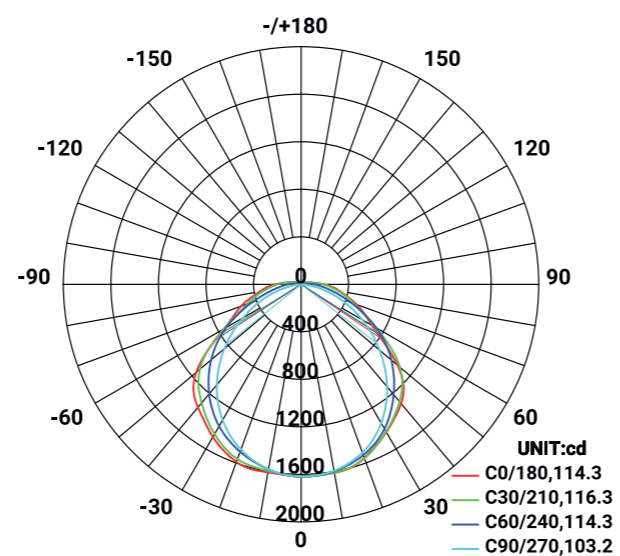

AVERAGE BEAM ANGLE(50%):112.0 DEG

## DUSTER III 150

Luminous intensity distribution diagram

Light source: **29-52W**  
Color temperature: **3CCT 3000/3500/4000 K**  
Lumens output: **4550-7500 lm**


CRI: **> 80**  
Optics: **160°**  
IP Rating: **66**

Color: **Grey / Frosted**

Emergency:  
**YES** 1221951EM

Streamer self-test 2W 3hours EM kit(Lion-battery)


Control:  
**ON/OFF** 1221951  
**DALI/PUSH** 1221951D

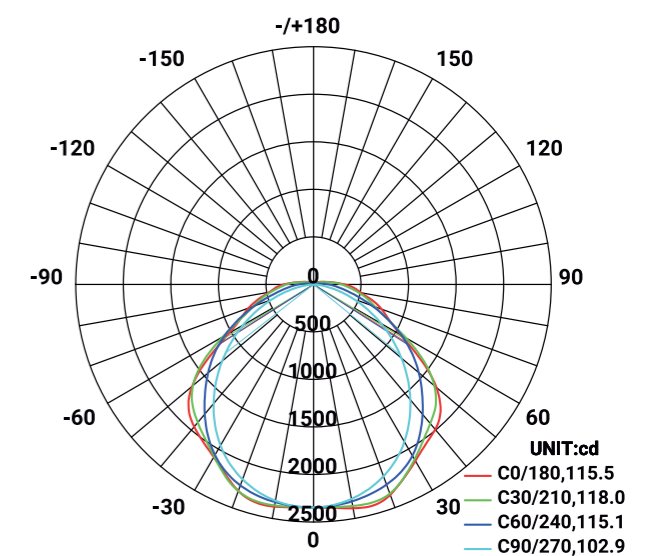

AVERAGE BEAM ANGLE(50%):112.9 DEG



DUSTER III DRIVER

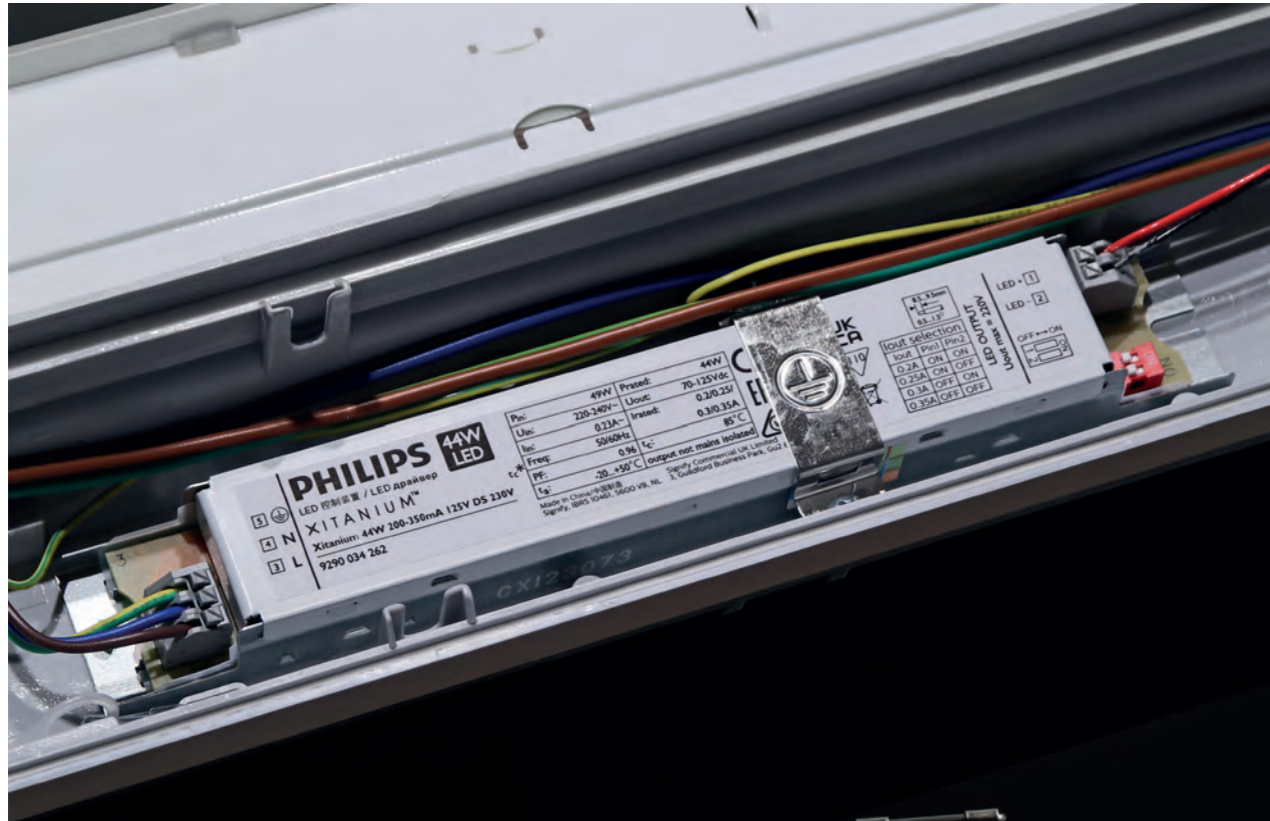

## PROFESSIONAL DRIVER

Xitanium LED drivers with single current output offer industry leading performance and reliability at optimized cost. They are ideal for high volume applications while delivering to specific requirements. These drivers offer the same level of performance as Xitanium adjustable current linear drivers to ensure high quality of light, but with a specific current setting for optimized performance. Due to the low output current ripple, you can be sure to offer your customers high quality of light without visual flicker and stroboscopic effects.

### Benefits

- High quality of light
- High reliability
- Optimized performance at specific output current settings

### Features

- Low output current tolerance
- Low output current ripple
- Flexible current setting (4 output currents –dipswitch)
- Suitable for Class I luminaires

## DUSTER III HF SENSOR

SETTING: DETECTION AREA/HOLD TIME/DAYLIGHT



## DUSTER III SUSPENSION KIT

Length: 2500 mm











[www.led2.eu](http://www.led2.eu)